

## Product Specifications

- Signal bandwidth: 840-940MHz
- Working voltage: 28V
- Power flatness: <1dB
- Upper sideband drift: <10MHz
- Lower sideband drift: <10MHz
- Output power: 41dBm

## Product Application

- GSM/CDMA、840-940MHz wireless signal shielding


## Product Description

YJM0910B is a wireless signal shielding module dedicated to 840-940MHz signal. This module has the advantages of high average output power, good in band flatness, small upper and lower sideband offset and so on.

## Product Display



## Product Dimensions

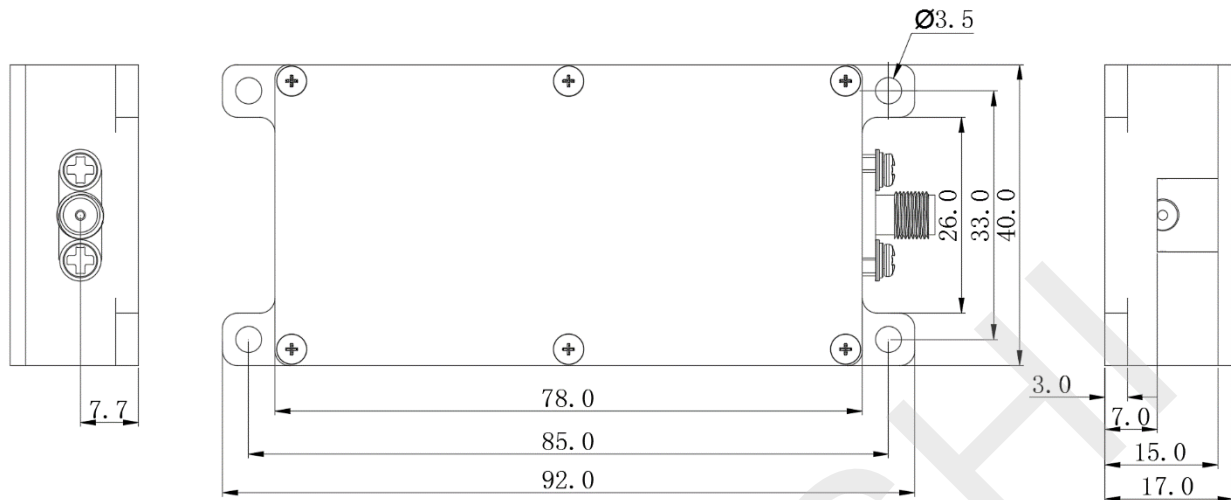

## Working conditions

Parameters	Value	Unit	Parameters	Value	Unit
Working voltage	28	V	Storage temperature	-40 ~ +120	°C
Working temperature	-30 ~ +70	°C	Relative humidity	<80%	RH

## Electrical Characteristics

Parameters	Characteristics			Unit	Conditions
	Max	Typ	Min		
<b>Test conditions</b>					<b>DC=28V, T=25°C</b>
Signal bandwidth	840		940	MHz	
Output power	40	41	42	dBm	
Power flatness		1		dB	
Working current		1		A	