


To avoid copter's damage and player's injury, please read this instruction before flying!



V319

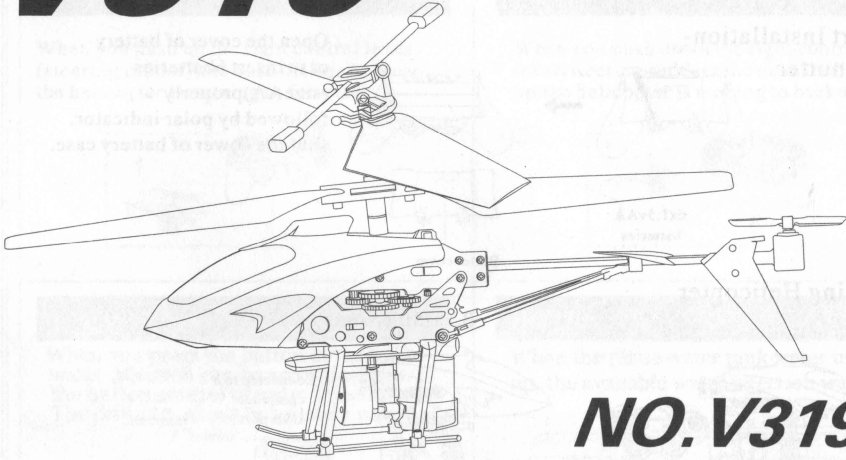


NO. V319

BUILT-IN ELECTRONIC GYROSCOPE


INSTRUCTIONS OF RC FOUNTAIN HELICOPTER

PACK LIST

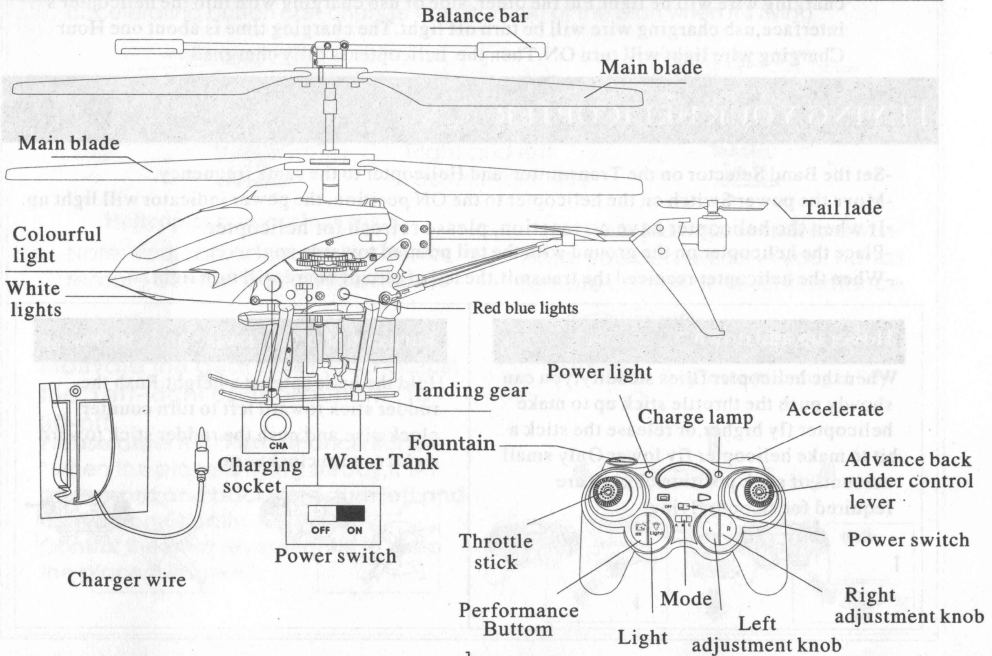

BATTERY INSTALLATION & CHARGING

Battery Installation- Transmitter

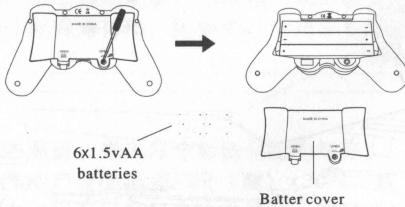


6x1.5V AA
batteries

Battery cover


Open the cover of battery case insert 6 batteries (size AA) properly followed by polar indicator, shut the cover of battery case.

Charging Helicopter

A. controller charging



B. USB charging



Connected to a
computer
USB port



1. turn on the switch on the controller, Move the power switch on the helicopter to the "OFF" position

2. Charging way A: Put down the charging wire of the back controller and put out the charging wire, then put into the interface of the helicopter, when the charge lamp turn into colour green. The charging time is about one Hour. when charge lamp stops shining, charging finishes.


Charging way B: put the usb charging wire into the computer usb interface, the charging wire will light. Put the other side of usb charging wire into the helicopter's interface, usb charging wire will be turn off light. The charging time is about one Hour charging wire light will turn ON. Then the helicopter is fully charged.

FLYING YOUR HELICOPTER

- Set the Band Selector on the Transmitter and Helicopter to the same frequency.
- Move the power Switch on the helicopter to the ON position, the power indicator will light up.
- If when the helicopter have no reaction, please refresh for helicopter.
- Place the helicopter on the ground with the tail pointed towards you.
- When the helicopter received the transmit, the led of circuit board will turn light.


Hover up and down

When the helicopter flies steadily, you can slowly push the throttle stick up to make helicopter fly higher, or release the stick a bit to make helicopter fly lower. Only small amounts of stick position change are required for smooth flying.




Turn counter clockwise and clockwise

Hold the helicopter at a height. Push the rudder stick toward left to turn counter clockwise, and push the rudder stick toward right to turn clockwise.




Forward

When you push up the right control lever (steering rudder), the nose incline to down, the helicopter is moving to forward.




Backward

When you push down the right control lever (steering rudder), the nose incline to up, the helicopter is moving to backward.



Fountain

When you press the button at the top of water injection can be according to put the button control of water injection. The distance, about two meters range.




Injection

When the plane water tank water used up, the available water injection water.




If rotated while operating, pls use the fine tuning and rudder to revised it

When press the light button, you can see the light of the plan shining; pressing "turn around" button can change the direction of the plane; pressing accelerating button can change the direction of the plan when it's flying

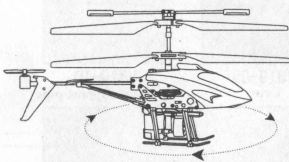


Helicopter rotates clockwis

Note: you can adjust in your hands remote contorl "L"keyUntil balance



Right and left adjustment Key

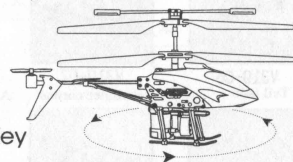

Helicopter rotates anticlockwise

Note: you can adjust in your hands remote contorl "R"keyUntil balance

Showing step:


Motivate the gear lever, and adjust the "Left-Right control button" to lift-off.

Please press the "Performance Button" when the plane is flying steady, it will go forward and backward, turn left and right automatically.

Control the gear lever slightly to keep the plane flying well.



Relief drill function, please press right key

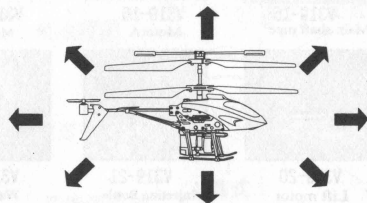

OPERATION:

- * Don't operate the helicopter under the direct sun or strong lighting; it will affect the control system of your helicopter.
- * Don't cover the lens of the transmitter. No signal will be released while you cover the lens.
- * Don't stick any other label onto the helicopter; the other label will affect receiving of IR signal.
- * The product uses light-minded materials, it will easy to damage if operate incorrectly, tumble or bump or another factor will shatter the product.

ENVIRONMENT FOR FLIGHT:

1. Indoor environment with calm air condition .Beware of the air circulation from the air-conditioner.
2. Space area: It is recommended to have to have space area over 20ft (W) X 30ft(L) X10ft(H).
3. Safety area: It is recommended that there is no electric fan, air-conditioner, reading lamp or other dangerous objects to flying.

SPARE PARTS LIST

Order by item number from local distributors.



V319-01
Head cover




V319-02
Main blade




V319-03
Tail decoration



V319-04
Connect buckle




V319-05
Balance bar




V319-06
Tail lade




V319-07
Helicopter corpus



V319-08
Ascend and Descend



V319-09
Car



V319-10
Tail support pipe




V319-11




V319-12



V319-13
Main shaft




V319-14
Chopper tail unit module




V319-15
Main start pipe




V319-16
MotorA




V319-17
MotorB




V319-18
Circuit board




V319-19
3.7VLi-poly



V319-20
Lift motor




V319-21
Injection Bottle



V319-22
Water Tank



V319-23
Tank Parts



V319-24
Base